


Fiberglass Cloth (HT800)

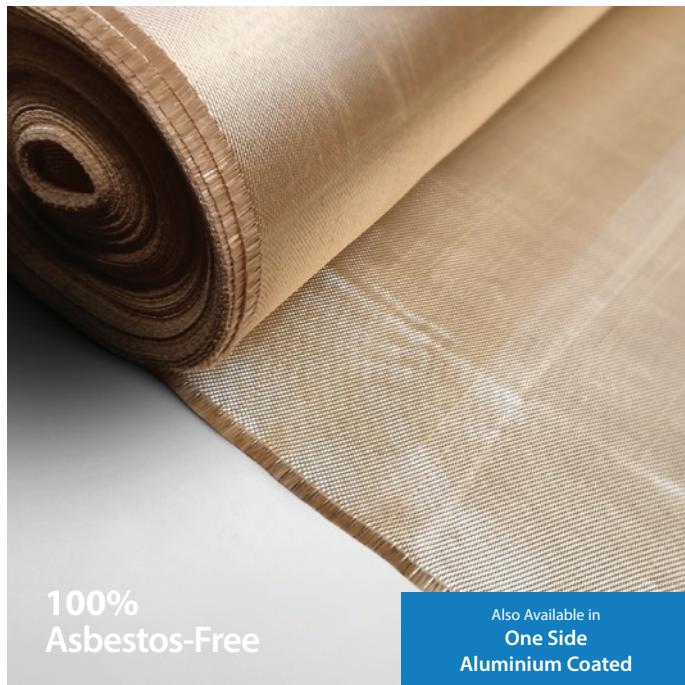

CVS® Fiberglass Cloth (HT800) is effectively used to shield against moderate to heavy welding sparks, it has a non-hairy texture preventing irritation to the exposed skin.

Applications:

Suitable for pipe lagging, expansion joints, heat shields, welding blankets, fire curtains, machinery protection, and insulation pads for removable flanges and valve covers.

Product Features:

- High heat resistance
- High tensile strength
- Good thermal conductivity
- Good chemical resistance
- Flame resistance

Technical Specifications:

Temperature Resistance up to	550°C
Weave Style	8 HS
Warp Style	ET9 33 4x2
Weft Style	ET9 33 4x2
Warp Density	18 ± 2 PER/cm
Weft Density	13 ± 1.5 PER/cm
Warp Tensile	300 ± 5% N/TEX
Weft Tensile	300 ± 5% N/TEX
Treated Processing	Heat Treated
Color	Golden Brown

Availability:

IMPA	Product Description	Thickness	Size	Unit
811701	Fiberglass Cloth (HT800)	1mm	1m x 1m	meter*

*When ordering, please specify the **total length required (in meters)** for the product.

Disclaimer

Accuracy of all technical data and information are provided to the best knowledge of the manufacturer. Properties, specifications and application parameters are subject to change without notice. The manufacturer does not undertake any liability of any kind whatsoever.

We're Here To Help

Have questions about the services we offer, or enquiries about our product range?

Aste Global Pte. Ltd.
Singapore Head Office
tel. +65 6862 1212
fax +65 6897 9959
info@aste.com.sg

Aste Trading (Europe) B.V.
Rotterdam Office
tel. +31 (0)10-7470077
fax +31 (0)10-2687006
info@aste-trading.com

Aste (Shanghai) Co. Ltd.
Shanghai Office
tel. +86 021-50183908
fax +86 021-50183909
shanghai@aste-sh.com

Visit
aste.com.sg

